


BATES BC® BOOTHCOATING GLUE RELEASE



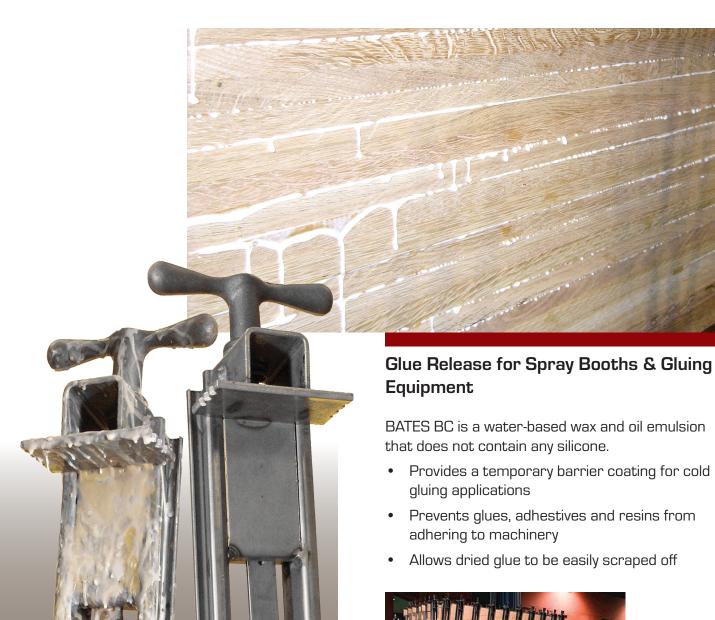

Technical Specifications

BATES BC® is a water-based wax and oil emulsion that dries into a durable, soft, slippery film, allowing for easy scraping and removal of glue in accumulation areas. It provides temporary, effective protection from unwanted build-up of highly active compounds such as adhesives, resins and fiberglass.

APPLICATION & USE

Use BATES BC on non-porous surfaces. DO NOT use on walkways as product is slippery. It can be used in areas with moving parts and tight tolerances.

BATES BC is intended for cold gluing applications up to 100°F/38°C.

Application: Product can be sprayed, brushed or rolled onto surfaces that need to be protected. Allow 2-3 hours for product to dry completely. Recommend allowing product to dry overnight. Coating thickness varies depending on protection needs.

Clean-Up: Remove using a scraper or straight-edged scraping tool to lift the accumulated compunds. Reapply after clean-up process has been completed. Clean application tools using soap and hot water.

PROPERTIES & STORAGE


BATES BC is a stable wax and oil emulsion that contains no silicones.

Appearance: Viscous white or creamy liquid that dries to a transparent film

Viscosity: 3750 cps Specific Gravity: 0.96

 $\textbf{Storage:} \ \text{BATES BC should be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not also should be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint, in temperature controlled areas between 50°F/10°C and 90°F/32°C. Do not be stored like paint are stored like p$

expose $\operatorname{BATES}\operatorname{BC}$ to freezing temperatures.



5 gallon/20.4 kg Pail 55 gallon/195 kg Drum



 $\textbf{\textit{For International Sales:}} \quad \text{Please contact U} \cdot \text{C Coatings or your regional distributor}$

Tel: +1 (716) 833-9366 Fax: +1 (716) 833-0120 exportdesk@uccoatings.com www.uccoatings.com

U·C Coatings, LLC | PO Box 1066 | Buffalo, NY 14215 USA